

SutureLasso™ Suture Passers

- Small 1.8 mm outer diameter distal tip for atraumatic suture passage
- Passage of nitinol loop, #2 FiberStick™ suture, or monofilament (PDS) suture
- Sterile, single-patient use

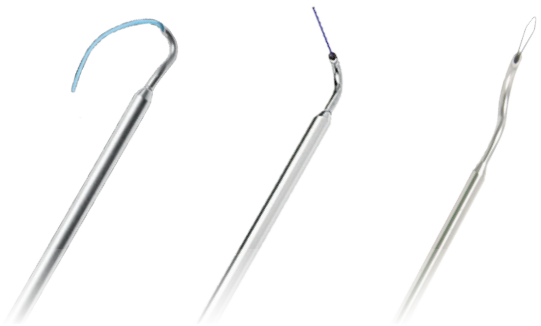


Small Diameter (SD) SutureLasso Suture Passer


Thumb pad for one-handed nitinol loop or suture deployment/retraction

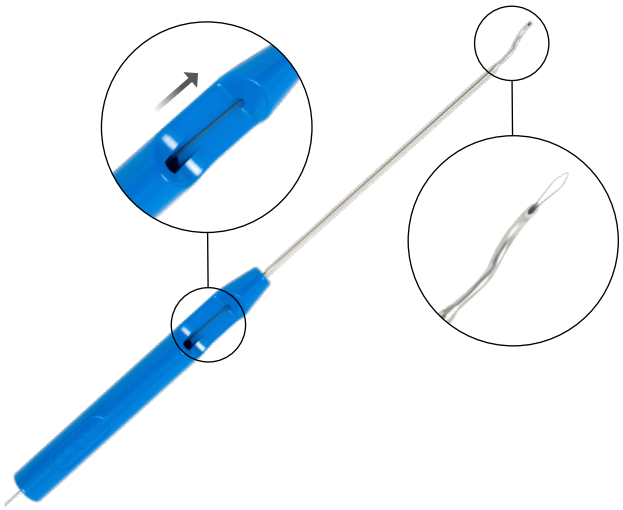

QuickPass™ SutureLasso Suture Passer


Thumbwheel for one-handed nitinol loop or suture deployment/retraction

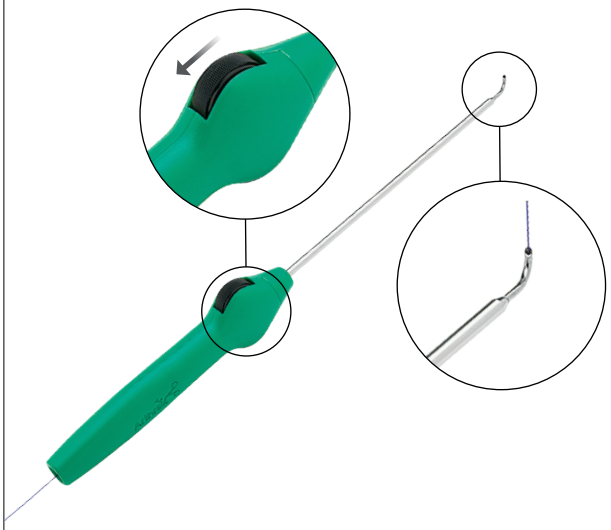


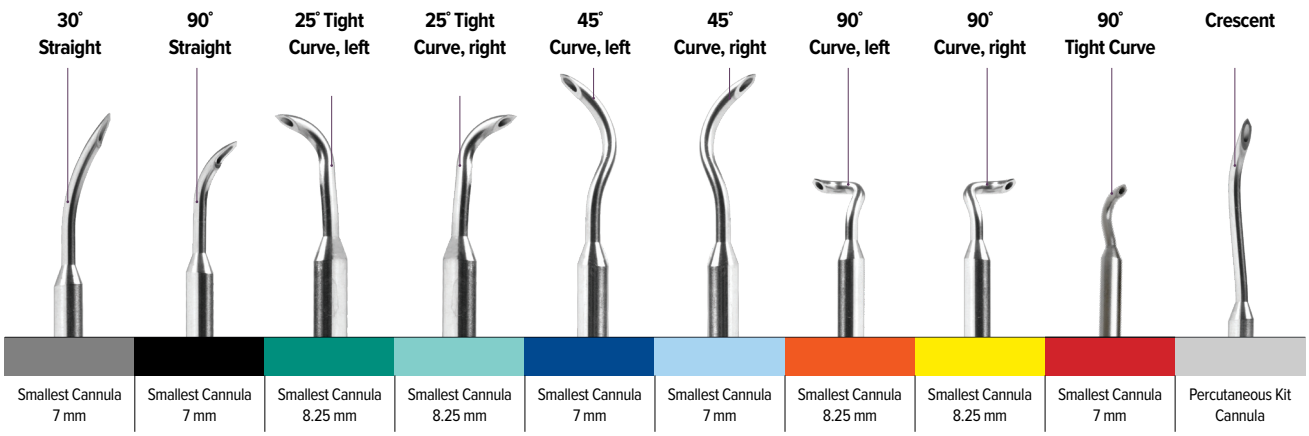

ReelPass SutureLasso™ Suture Passer

Single-patient use suture-passing device with a sharp 1.5 mm-diameter tip that is the smallest on the market

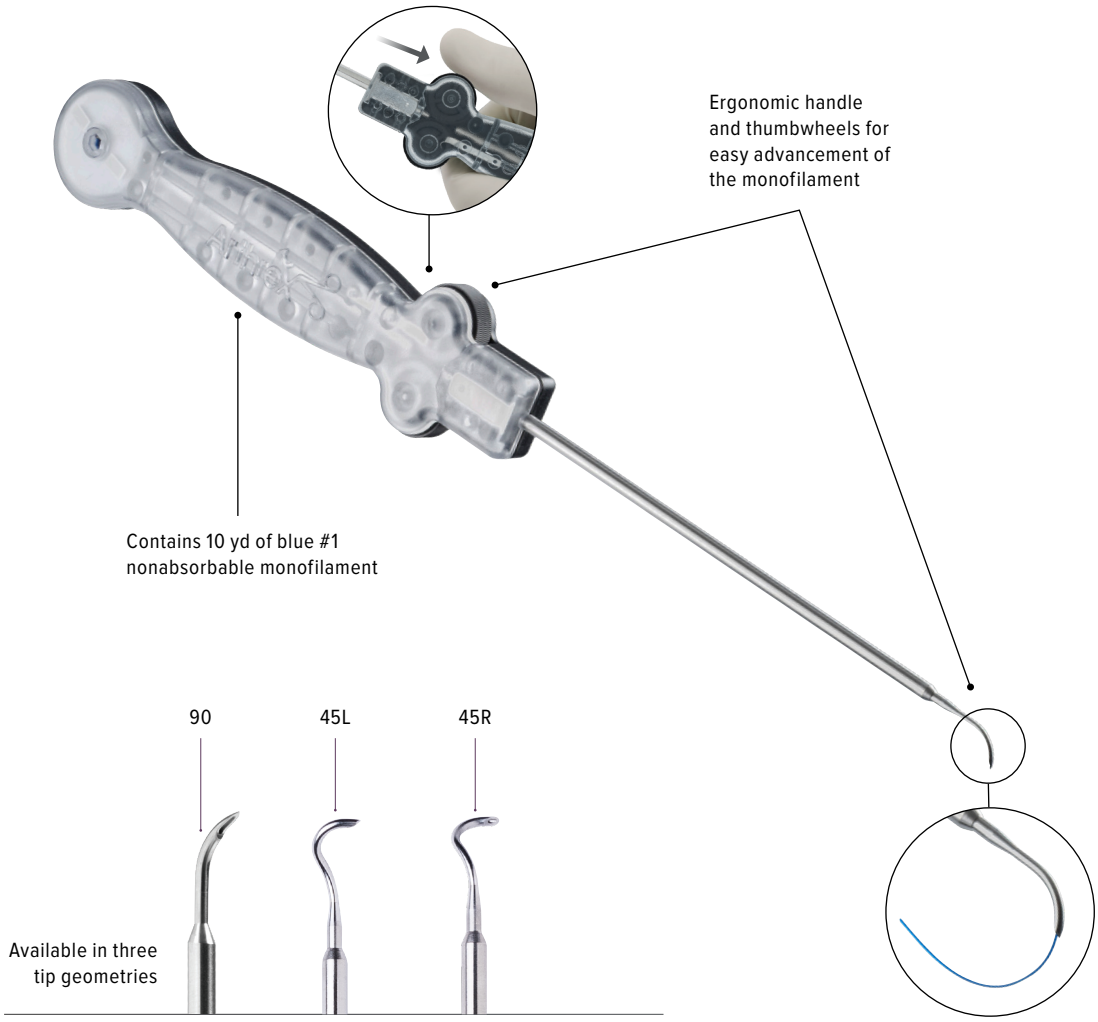

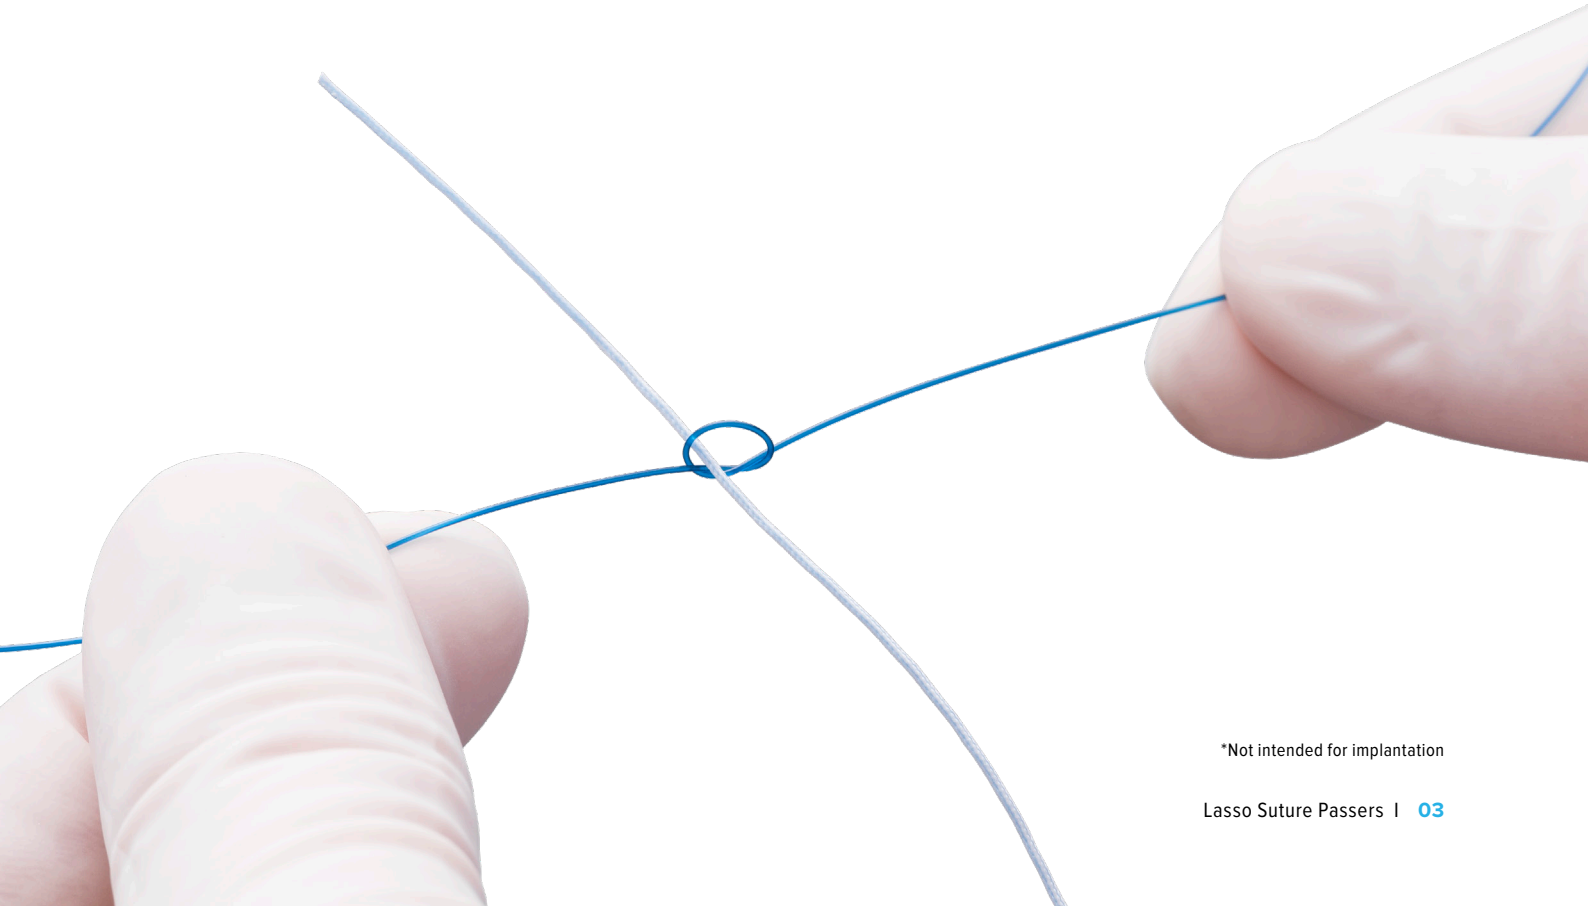


*Not intended for implantation


Rotation Lasso Suture Passer

The Rotation Lasso is a suture-passing instrument with a deployable rotating nitinol loop that allows for an efficient all-inside passing technique.

- Simplistic, ergonomic design facilitates easy and intuitive use for arthroscopic or open soft-tissue repairs
- Reduces procedural steps by eliminating the need for outside suture shuttling
- White spool handle mechanism allows one-handed deployment and maneuverability of a nitinol loop for easy suture retrieval in difficult joint spaces

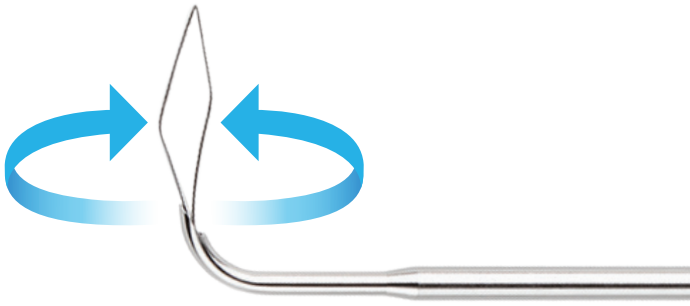


90°, 2 mm-diameter tip

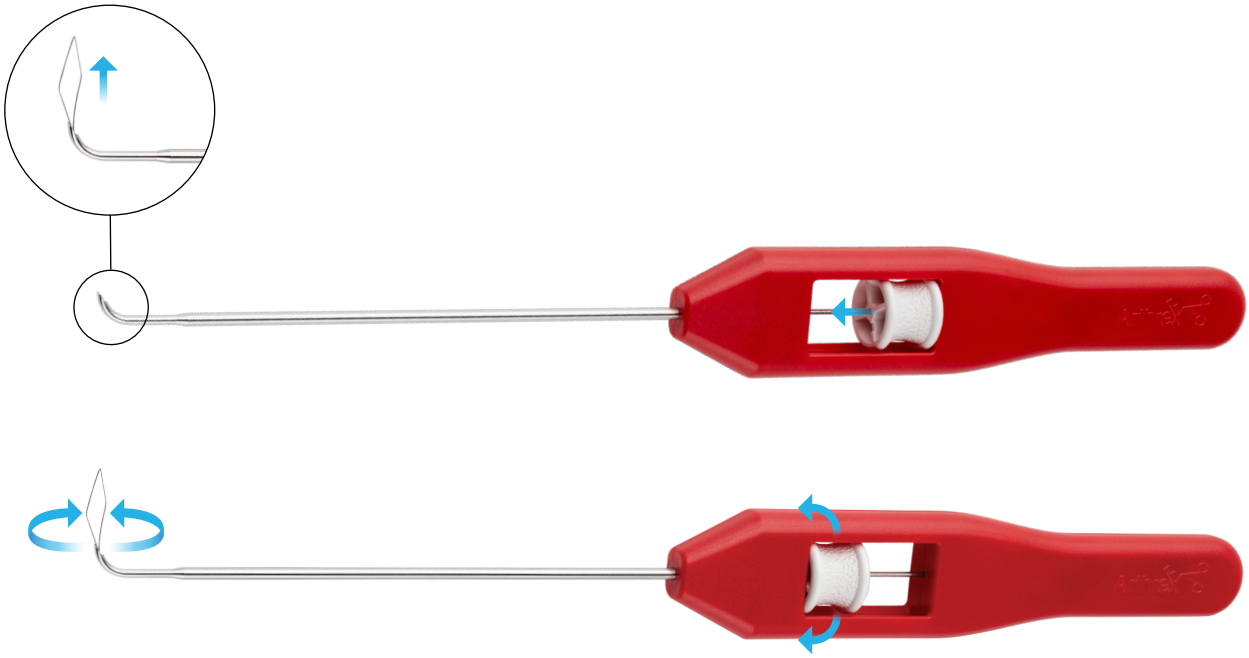

SutureLasso™ Suture Passer

The original SutureLasso suture passers are designed with various curved 2.3 mm-diameter tip geometries for arthroscopic Bankart, SLAP, and rotator cuff repairs.

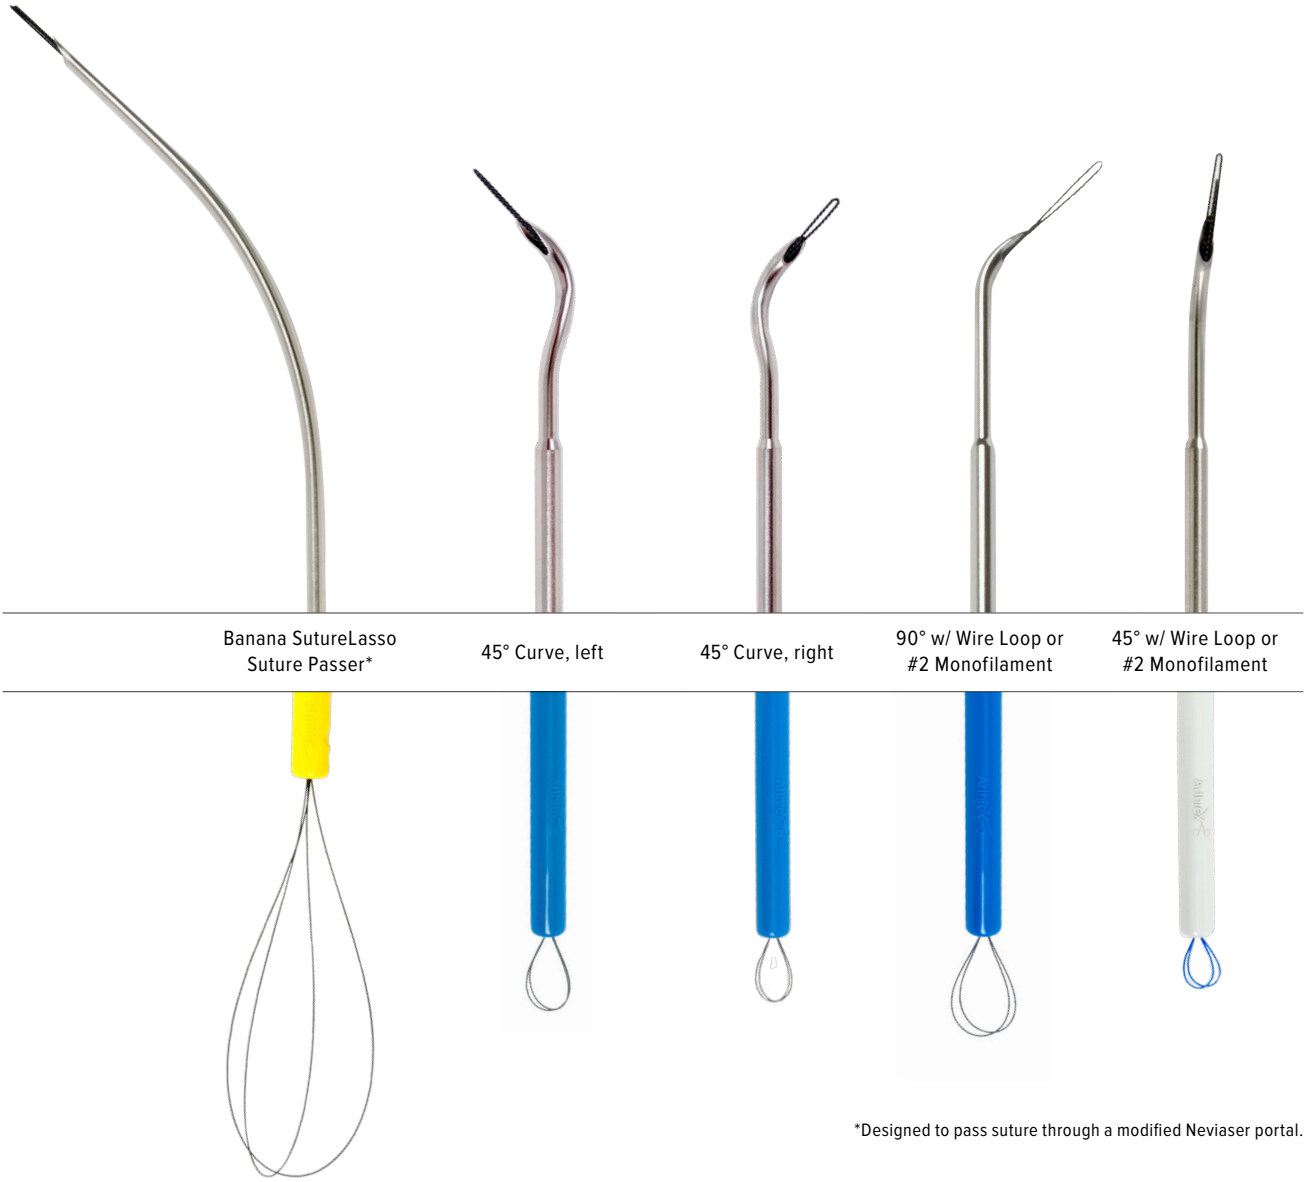

Banana SutureLasso Suture Passer*	45° Curve, left	45° Curve, right	90° w/ Wire Loop or #2 Monofilament	45° w/ Wire Loop or #2 Monofilament

*Designed to pass suture through a modified Neviaser portal.

Transosseous Suture Passer

With a 6-inch malleable shaft, the transosseous suture passer is designed to navigate through bony sockets and tunnels.



Durable nitinol capture loop for passing grafts or suture

Malleable shaft

Comfortable plastic handle for instrument maneuverability

Micro SutureLasso™ Suture Passer

The Micro SutureLasso suture passers are designed with cannulated stainless steel needles for simple percutaneous suture passing during rotator cuff and glenoid labrum repairs.

- 6-inch long, 1.25 mm-diameter rigid stainless steel needle
- Preloaded braided nitinol wire loop for suture shuttling
- Minor distal bend, major distal bend, and straight needle configurations to accommodate various hard-to-reach joint areas



